




# CQD14 PRO

LI-ION 80V REACH TRUCK 1.4T

 1400 kg  8000 mm  80 V Li-Ion




The CQD14/16 PRO series is ideal for high-density warehouses, logistics hubs, and distribution centers. Its optimized mast provides stability at full lift height, while proportional lifting ensures gentle and accurate handling of heavy or fragile goods. With a compact chassis and tight turning radius, it is well-suited for narrow aisles and space-restricted environments. Optional features such as cold storage configuration, safety lamps, and telematics make it adaptable to diverse industry needs.

SPECIFICATION	REF	UNIT	VALUE
Battery type			Li-Ion
Battery nominal capacity K5		Ah	205
Battery voltage		V	80
Rated capacity	Q	kg	1400
Load centre distance	c	mm	600
Service weight		kg	3905
Height, mast lowered	$h_1$	mm	3383
Lift	$h_3$	mm	8000
Height, mast extended	$h_4$	mm	8730
Overall length	$l_1$	mm	2415
Overall width	$b_1/b_2$	mm	1250/1270
Length to face of forks	$l_2$	mm	1265
Fork dimensions	s/e/l	mm	40/100/1150
Turning radius	Wa	mm	1629
Manufacturer			CQD14 PRO
Model designation			EP

# Features

## Compact and agile design

With a working aisle width of just 2701 mm, the CQD14/16 PRO is perfectly suited for narrow aisles and high-density racking. Its small turning radius adds agility, making it highly competitive in space-constrained warehouses.

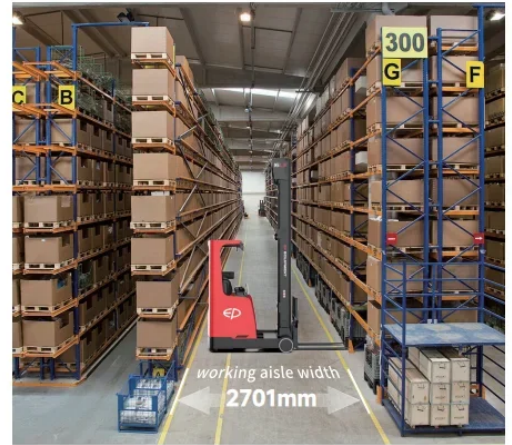

## Enhanced mast stability

The optimized mast reaches up to 8 m (CQD14 PRO) and 9.65 m (CQD16 PRO), ensuring stability even under heavy loads. High residual capacity at full height guarantees consistent performance in demanding operations.

## Efficient Li-ion power system

Powered by an 80V Li-ion battery (150–280Ah), the series supports fast lifting and lowering speeds and offers convenient external charging. The Li-ion system enables opportunity charging and eliminates battery maintenance.




## Operator-focused ergonomics

A spacious cab with unobstructed visibility, electronic steering with damping, and fingertip or joystick controls enhance safety and comfort. Features like proportional lifting and full-color display provide precise handling and ease of use.

# VDI Chart

	SPECIFICATION	REF	UNIT	VALUE
1.1	Manufacturer			CQD14 PRO
1.2	Model designation			EP
1.3	Drive			Electric
1.4	Operator type			Seated
1.5	Rated capacity	Q	kg	1400
1.6	Load centre distance	c	mm	600
1.8	Load distance, centre of drive axle to fork	x	mm	340
1.9	Wheelbase	y	mm	1365
2.1	Service weight		kg	3905
2.2	Axle loading, laden front/rear		kg	1085/4250
2.3	Axle loading, unladen front/rear		kg	2495/1415
3.1	Tyres			Polyurethane
3.2	Tyre size, front		mm	Φ343×140
3.3	Tyre size, rear		mm	Φ285×100
3.4	Additional wheels (castor wheels)		mm	-
3.5	Wheels, number front/rear (x=drive wheels)			1x/2
3.6	Tread width, front	b <sub>10</sub>	mm	-
3.7	Tread width, rear	b <sub>11</sub>	mm	1168
4.1	Tilt of mast/fork carriage forward/backward		°	2/4
4.2	Height, mast lowered	h <sub>1</sub>	mm	3383
4.3	Free lift	h <sub>2</sub>	mm	2330
4.4	Lift	h <sub>3</sub>	mm	8000
4.5	Height, mast extended	h <sub>4</sub>	mm	8730
4.7	Height of overhead guard (cabin)	h <sub>6</sub>	mm	2200
4.8	Seat height relating to SIP/stand height	h <sub>7</sub>	mm	1000
4.10	Height of wheel arms		mm	308
4.19	Overall length	l <sub>1</sub>	mm	2415
4.20	Length to face of forks	l <sub>2</sub>	mm	1265
4.21	Overall width	b <sub>1</sub> /b <sub>2</sub>	mm	1250/1270
4.22	Fork dimensions	s/e/l	mm	40/100/1150
4.23	Fork carriage ISO 2328, class/type A, B			2A
4.24	Fork carriage width		mm	990

SPECIFICATION		REF	UNIT	VALUE
4.25	Distance between fork-arms	b <sub>5</sub>	mm	200/770
4.26	Distance between wheel arms/loading surfaces			917
4.31	Ground clearance, laden, below mast		mm	75
4.32	Ground clearance, centre of wheelbase	m <sub>2</sub>	mm	70
4.34.1	Aisle width for pallets 1000×1200 crossways	Ast	mm	2701
4.34.2	Aisle width for pallets 800 × 1200 lengthways	Ast	mm	2755
4.35	Turning radius	Wa	mm	1629
5.1	Travel speed, laden/unladen		km/h	11/11
5.2	Lift speed, laden/unladen		m/s	0.45/0.6
5.3	Lowering speed, laden/unladen		m/s	0.54/0.5
5.8	Max. gradeability, laden/unladen		%	10/15
5.10	Service brake			Electromagnetic
5.11	Parking brake			Electromagnetic
6.1	Drive motor rating S2 60 min		kW	8
6.2	Lift motor rating at S3 15%		kW	22
6.4	Battery nominal capacity K5		Ah	205
6.4	Battery voltage		V	80
6.4.1	Battery type			Li-Ion
6.5	Battery weight		kg	180
8.1	Type of drive unit			AC
10.5	Steering design			Electronic
10.7	Sound pressure level at the driver's seat		dB(A)	70
15.1	Charger output current		A	100

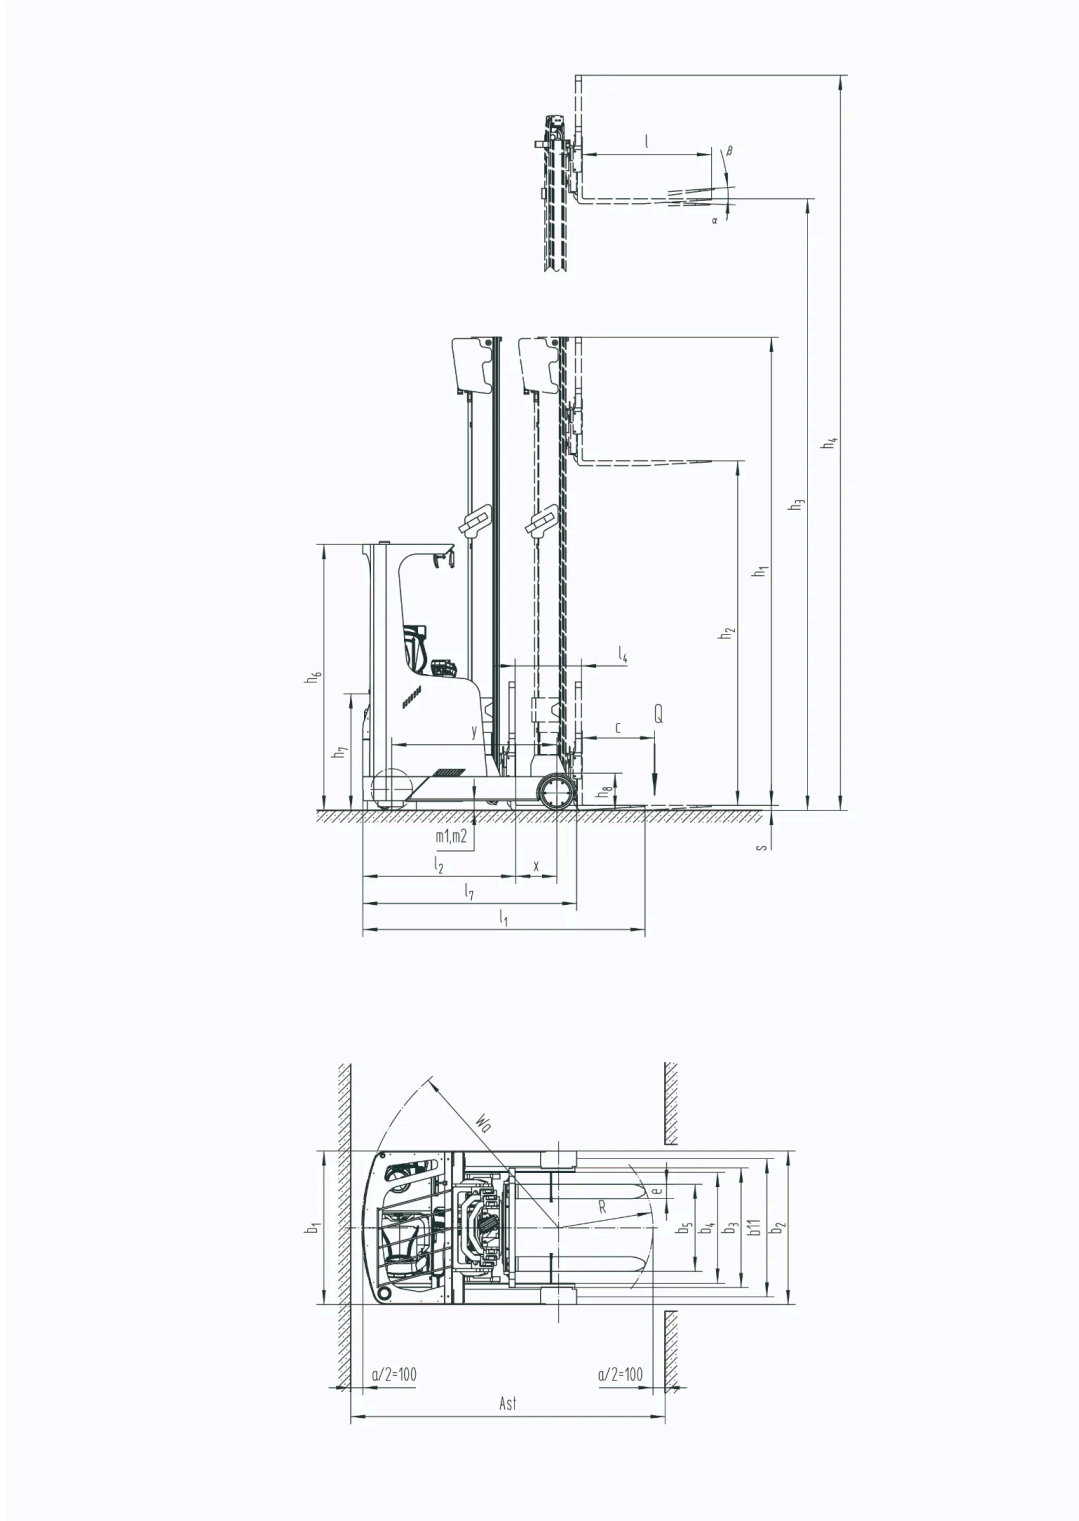


# RATED CAPACITIES GRAPH

CAPACITY  
(kg)

CQD14L3

LIFTING HEIGHT  
(mm)

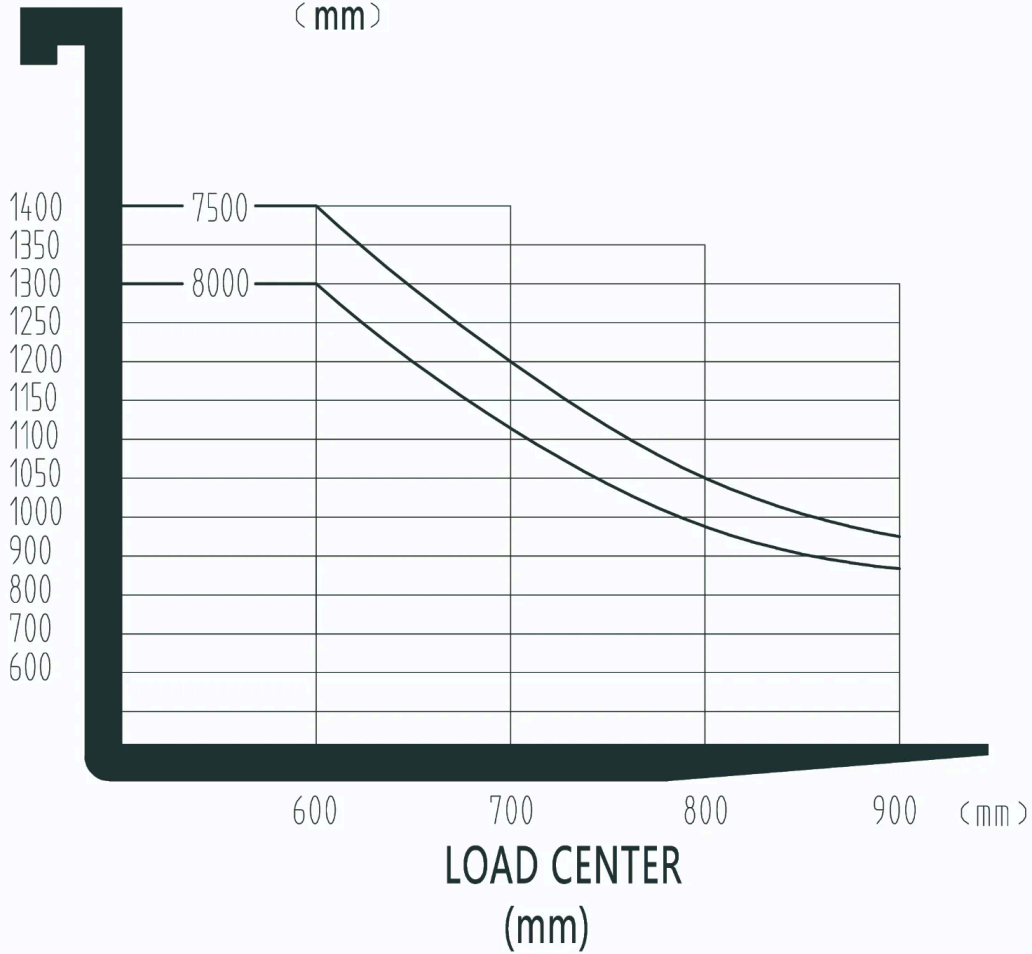

## Mast Options

MAST TYPE	LIFT HEIGHT (H3, MM)	MAST LOWERED HEIGHT (H1, MM)	MAST EXTENDED HEIGHT, NO BACKREST (H4, MM)	MAST EXTENDED HEIGHT, WITH BACKREST (H4, MM)	FREE LIFT HEIGHT, NO BACKREST (H2, MM)	FREE LIFT HEIGHT, WITH BACKREST (H2, MM)
3-Free Mast	4000	1968	4730	5065	1044	915
3-Free Mast	4500	2138	5230	5565	1214	1085
3-Free Mast	5000	2303	5730	6065	1380	1250
3-Free Mast	5500	2468	6230	6565	1544	1415
3-Free Mast	6000	2638	6730	7065	1714	1585
3-Free Mast	6500	2810	7230	7565	1888	1757

MAST TYPE	LIFT HEIGHT (H3, MM)	MAST LOWERED HEIGHT (H1, MM)	MAST EXTENDED HEIGHT, NO BACKREST (H4, MM)	MAST EXTENDED HEIGHT, WITH BACKREST (H4, MM)	FREE LIFT HEIGHT, NO BACKREST (H2, MM)	FREE LIFT HEIGHT, WITH BACKREST (H2, MM)
3-Free Mast	7000	3048	7730	8065	2124	1995
3-Free Mast	7500	3218	8230	8565	2294	2165
3-Free Mast	8000	3383	8730	9065	2460	2330

## Options

ITEM	OPTIONS (optional items marked in yellow)
Fork dimension	100*40*1150   100*40*920   100*40*1070   100*40*1220   100*40*1370   100*40*1520
Leg width	917
Fork carriage width option	770mm
Load wheel type	Single
Load wheel material	PU
Drive wheel material	PU
Battery capacity	205Ah   150Ah   280Ah
Charger	80V-150A-Li external   80V-100A-Li external
Seat type	Suspension   Suspension +safety belt logic switch
Attachments	Built-in sideshifter
Anti-static chain	Yes
Castor wheels	No   Yes and not customized
Front lamp	LED
Rear lamp	No   LED
Warning lamp	No   Yes and not customized
Area warning lamp	No   Yes and not customized
Rearview mirror	Yes
Buzzer	No   Yes and not customized
OPS system	Yes and not customized
Telematics	Yes
Cold storage	No   Yes and not customized
Overhead guard	Yes   Drive-in
Turn speed control	Yes

ITEM	OPTIONS (optional items marked in yellow)
Operator identification device	No   Card reader   Fingerprint lock
Load backrest height	1020mm