



# TVL182

## 80V DUAL-DRIVE THREE-WHEEL COUNTERBALANCE FORKLIFT 1.8T

1800 kg 6000 mm 80 V Li-Ion



The TVL182 is a 80V lithium-ion 3 wheels forklift purpose-built for loading, unloading and stock goods on production plants, retail storage and logistics hub including low-ceiling warehouse environments thanks to the overhead guard height below 2 meters. Its compact chassis and tight turning radius enable agile operation in confined aisles, while the dual 80V PMS motors ensure stable power output for smooth lifting and acceleration. TVL offers energy-efficient operation, minimal noise, and outstanding operator comfort — even in continuous-use applications.

SPECIFICATION	REF	UNIT	VALUE
Battery type			Li-Ion
Battery nominal capacity		Ah	230
Battery voltage		V	80
Load capacity	Q	kg	1800
Overall width	b <sub>1</sub> /b <sub>2</sub>	mm	1062
Length to face of forks	l <sub>2</sub>	mm	2013
Turning radius		Wa	1641
Load distance, centre of drive axle to fork		mm	382
Wheelbase		mm	1400
Tyre size, front		mm	18X7-8
Tyre size, rear		mm	140/55-9
Max lift height	H	mm	6000
Aisle width for pallets 1000×1200 crossways		Ast	3320
Aisle width for pallets 800×1200 lengthways		Ast	3446
Height of overhead guard (cabin)		mm	1984
Seat height/standing height		mm	1017

# Features

## Innovative integral cast chassis for superior stability

The TVL182/202 is built on EP's self-developed integral cast chassis design, which means there's no longer a joint interface between chassis and counterweight. It delivers outstanding structural strength and a naturally lower center of gravity. This ensures excellent truck stability even under full load and at high lift heights, while minimizing vibration and mast shaking. The robust frame further enhances durability, extending the service life of the truck.



## Compact size for operations in low-clearance and tight spaces

With an overall height of less than 2,000mm, the TVL182/202 is designed for seamless operation in confined spaces such as containers, underground garages, and low-ceiling warehouses. Combined with a tight turning radius of just 1,641mm (TVL182), this compact truck offers agility, enabling operators to retrieve and stack efficiently in areas where conventional forklifts simply cannot fit.

## 80V Dual drive motors and PMSM technology

Equipped with 80V dual drive motors with advanced Permanent Magnet Synchronous Motor (PMSM) technology, the TVL182/202 delivers sensitive steering and up to 10-15% energy savings compared with conventional forklifts.






## Dual charging flexibility

The lithium-powered TVL182/202 is equipped as standard with an 80V/35A internal single phase charger and the plug for external charger connection. Selection of external single phase or three-phase chargers with power up to 80V 100A give operators flexible and efficient charging options for all working scenarios.

## Safety-guaranteed functions

Safety is further supported by automatic stop on ramp, electromagnetic parking brake, and turn speed control, making every turn and stop at ramp secure.

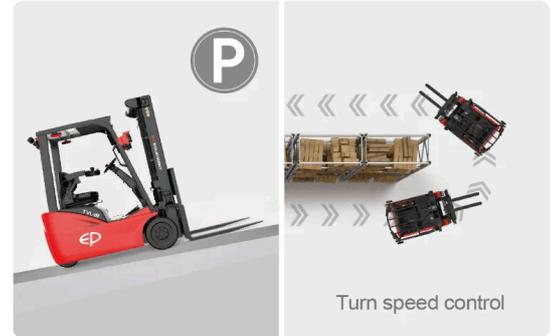

## Effortless and precise control

The TVL182/202 features joystick control as standard and fingertips as an option. Positioned at the end of armrest, all operations can be done just with fingers, increasing precision and ergonomics.

## Ergonomic and spacious operator workplace

The new chassis layout creates a larger operating space, giving drivers more legroom and comfort during long shifts. Combined with a wide-view mast and optimized overhead guard design, the TVL182/202 provides excellent visibility and minimizes blind spots, ensuring both a comfortable and safe driving experience.





## VDI Chart

	SPECIFICATION	REF	UNIT	VALUE
1.5	Load capacity	Q	kg	1800
1.8	Load distance, centre of drive axle to fork		mm	382
1.9	Wheelbase		mm	1400
3.2	Tyre size, front		mm	18X7-8

	SPECIFICATION	REF	UNIT	VALUE
3.3	Tyre size, rear		mm	140/55-9
4.0	Max lift height	H	mm	6000
4.20	Length to face of forks	l2	mm	2013
4.21	Overall width	b <sub>1</sub> /b <sub>2</sub>	mm	1062
4.34.1	Aisle width for pallets 1000×1200 crossways		Ast	3320
4.34.2	Aisle width for pallets 800×1200 lengthways		Ast	3446
4.35	Turning radius		Wa	1641
4.7	Height of overhead guard (cabin)		mm	1984
4.8	Seat height/standing height		mm	1017
5.1	Travel speed, laden/unladen		km/h	13/14
5.2	Lifting speed, laden/unladen		m/s	0.37/0.42
5.3	Lowering speed, laden/unladen		m/s	0.45/0.42
5.8	Max. gradeability, laden/unladen		%	15/17
6.1	Drive motor rating S2 60 min		kW	5.4x2
6.2	Lift motor rating at S3 15%		kW	16
6.4	Battery nominal capacity		Ah	230
6.4	Battery voltage		V	80
6.4.1	Battery type			Li-Ion

## RATED CAPACITIES AND LOAD CENTERES GRAPH

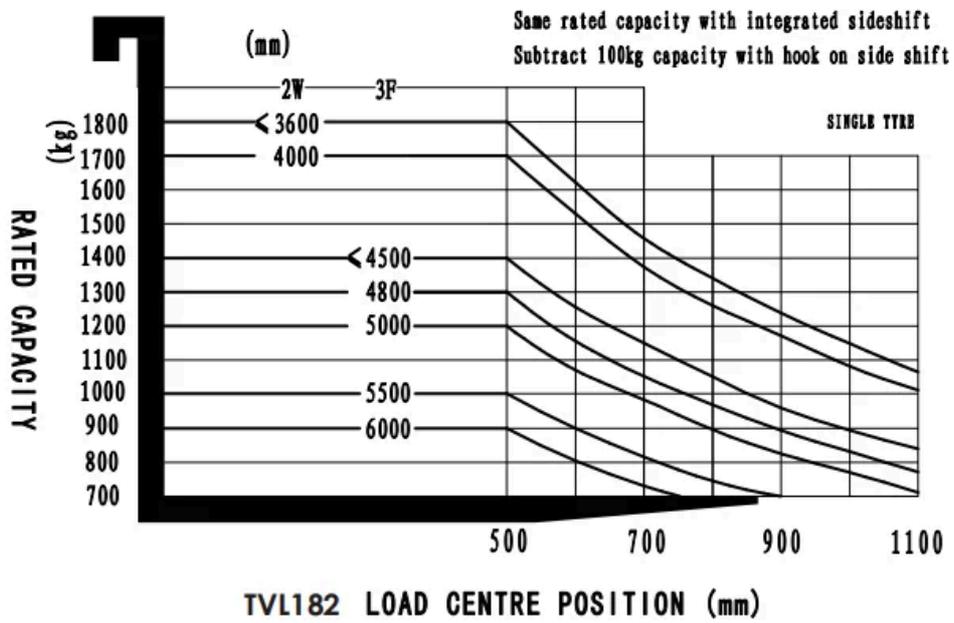

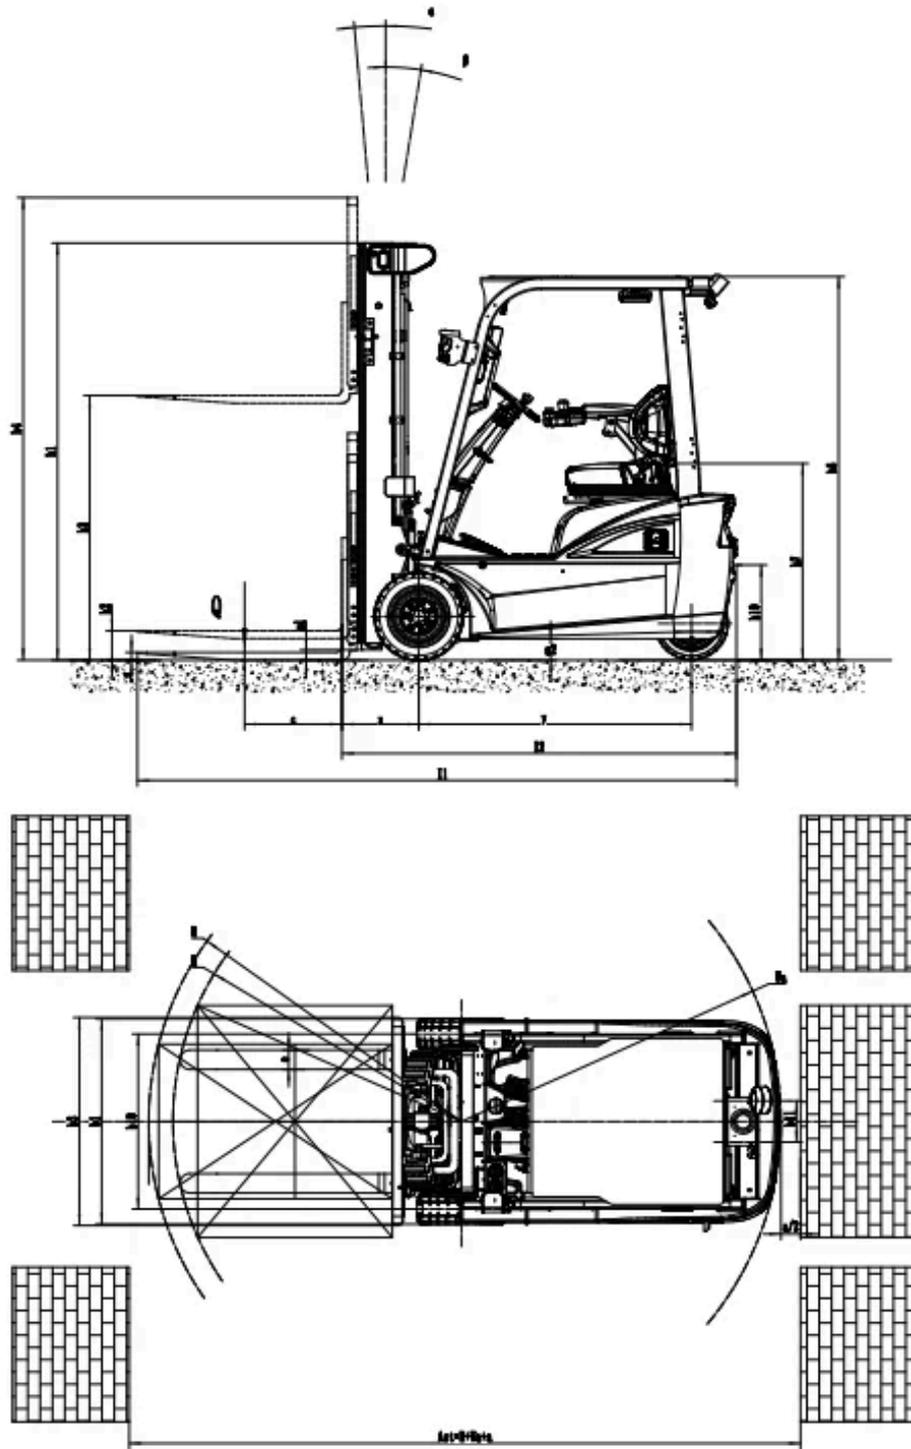

## Mast Options

MAST TYPE	LIFT HEIGHT (H3, MM)	MAST LOWERED HEIGHT (H1, MM)	MAST EXTENDED HEIGHT, NO BACKREST (H4, MM)	MAST EXTENDED HEIGHT, WITH BACKREST (H4, MM)	FREE LIFT HEIGHT, NO BACKREST (H2, MM)	FREE LIFT HEIGHT, WITH BACKREST (H2, MM)	FORWARD TILT (A, DEG)	BACKWARD TILT (B, MM)	LOAD DISTANCE (X, KG)
2-Standard Mast	3000	1995	3665	4054	100	100	5	5	382
2-Standard Mast	3600	2295	4265	4654	100	100	5	5	382

MAST TYPE	LIFT HEIGHT (H3, MM)	MAST LOWERED HEIGHT (H1, MM)	MAST EXTENDED HEIGHT, NO BACKREST (H4, MM)	MAST EXTENDED HEIGHT, WITH BACKREST (H4, MM)	FREE LIFT HEIGHT, NO BACKREST (H2, MM)	FREE LIFT HEIGHT, WITH BACKREST (H2, MM)	FORWARD TILT (A, DEG)	BACKWARD TILT (B, MM)	LOAD DISTANCE (X, KG)
2-Standard Mast	4000	2545	4665	5054	100	100	5	5	382
3-Free Mast	4350	2010	5015	5404	1375	835	5	5	394
3-Free Mast	4500	2060	5165	5554	1425	1035	5	5	394
3-Free Mast	4800	2160	5465	5854	1525	1135	5	5	394
3-Free Mast	5000	2225	5665	6054	1590	1200	5	5	394
3-Free Mast	5500	2395	6165	6554	1760	1370	5	5	394
3-Free Mast	6000	2610	6665	7054	1975	1585	5	5	394

## Options

ITEM	OPTIONS (optional items marked in yellow)
Fork dimension	100*40*920   100*40*1070   100*40*1100   100*40*1150   100*40*1220   100*40*1370   100*40*1520   100*40*1800   100*40*1200
Attachments	No   Built-in sidershifter   External shifter   Fork positioner with sideshift
Traction pin	Yes and not customized
Front wheel material	Normal solid   Traceless solid
Rear wheel material	Normal solid   Traceless solid
Battery capacity	80V150AH   80V230AH
Charger	80V-35A Internal   80V100A External
Battery display indicator (BDI)	With hourmeter (Bluetooth) without PSE
Area warning lamp	No   Both side   Both side and rear
Rearview mirror	One in front   Two on side and one in front
Buzzer	Yes and not customized
OPS system	Yes and not customized
USB interface	Cigarette lighter socket   USB dual port
Telematics	Yes and not customized
Front lamp	LED
Rear lamp	No   LED

ITEM	OPTIONS (optional items marked in yellow)
Blue lamp	No   Front   Rear   Front and rear
Cabin	No   Basic half-cabin   Upgrade full-cabin   Full cabin
Overhead guard	Yes and not customized
Special AUS/NZ options	No   Yes and not customized (Only for Australia standard)
Operator identification device	No   Card reader   Fingerprint lock
Lifting electronic limit	No   Yes and not customized
Hydraulic control	Electromagnetic
Rear armrest horn	No   Yes and not customized
Wiper water unit	No   Yes, only with cabin and not customized